



Yuasa Technisches Datenblatt

Yuasa HJ-S34B20L-A

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	35Ah
Kaltstartstrom (A) EN1	272A

Abmessungen

Länge	197mm
Breite	129mm
Höhe	227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	10.5kg
--	--------



Gehäuseeigenschaften

Gehäusetyp	B20 JIS AGM
Batteriehälter	N
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA


Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Adskiller	AGMSORTIMENT
Vibration	V1 (30Hz/3g/2hr)
Empfohlener Ladestrom	2A
Performance Marking	W5-C2-V2-E2

Anschlusspol Typ

T3


Small Japanese
JIS Terminal



Positive Terminal

Negative Terminal

Zellenanordnung

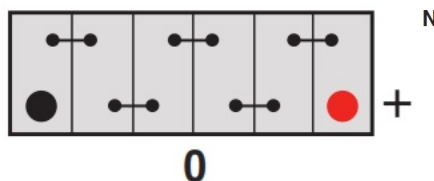

Batteriehälter



Datenblatt erstellt am 25/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa HJ-S34B20L-A

Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

Dimensions

Length	197mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



Container Features

Case Type	B20 JIS AGM
Hold Down	N
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A
Performance Marking	W5-C2-V2-E2

Terminal Type

T3


Small Japanese
JIS Terminal



Positive Terminal

Negative Terminal

Cell Assembly Layout

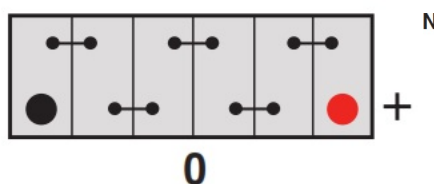

Battery Hold-down



Data Sheet generated on 25/04/2024 – E&OE