



Yuasa Technisches Datenblatt

Yuasa HJ-S46B24L(S)

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 45Ah
Kaltstartstrom (A) EN1 325A

Abmessungen

Länge 238mm
Breite 126mm
Höhe 227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 12.7kg



Gehäuseeigenschaften

Gehäusetyp B24 JIS AGM
Zellenanordnung 1
Batteriehälter N
Tragegriffe ✓
Semi Traktionseigenschaften ✓
Deckeltyp VRLA

Technologie

Flammschutz ✓
Technologie Ca/Ca VRLA
Adskiller AGMSORTIMENT
Vibration V1 (30Hz/3g/2hr)
Empfohlener Ladestrom 3A
Performance Marking W5-C2-V2-E2


Anschlusspol Typ

T1

Standard DIN Post



Zellenanordnung

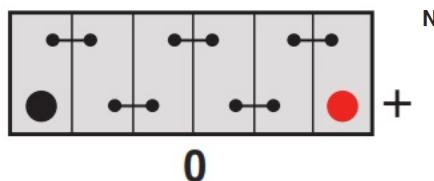

Batteriehälter



Datenblatt erstellt am 25/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa HJ-S46B24L(S)

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	325A

Dimensions

Length	238mm
Width	126mm
Height	227mm

Weights & Measures

Mean Weight with Acid	12.7kg
-----------------------	--------



Container Features

Case Type	B24 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A
Performance Marking	W5-C2-V2-E2

Terminal Type

T1


Standard DIN Post



Positive Terminal

Negative Terminal

Cell Assembly Layout

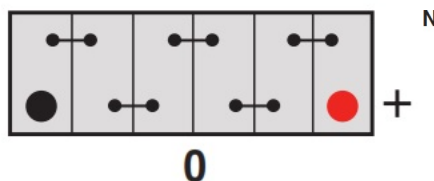

Battery Hold-down



Data Sheet generated on 25/04/2024 – E&OE