



## Yuasa Technisches Datenblatt

### Yuasa L26-70 - Leisure-Batterien

#### Leistung

|                               |       |
|-------------------------------|-------|
| Spannung                      | 12V   |
| Kapazität 20 Std (vorgegeben) | 70Ah  |
| Kaltstartstrom (A) EN1        | 480A  |
| Marine Cranking Amps (MCA)    | 580A  |
| Watt Hour                     | 840Wh |

#### Abmessungen

|        |       |
|--------|-------|
| Länge  | 260mm |
| Breite | 174mm |
| Höhe   | 225mm |



#### Maße und Gewichte

|                            |           |
|----------------------------|-----------|
| Durchschnittliches Gewicht | 18kg      |
| inkl. Säure                |           |
| Säurevolumen               | 4.4 Liter |

#### Gehäuseeigenschaften

|                     |                  |
|---------------------|------------------|
| Gehäusotyp          | GR24 BCI         |
| Zellenanordnung     | 1                |
| Batteriehälter      | B5               |
| Ladezustandsanzeige | ✓                |
| Tragegriffe         | ✓                |
| Entgasung           | ✓                |
| Deckeltyp           | Zentralentgasung |

#### Technologie

|                       |       |
|-----------------------|-------|
| Flammschutz           | ✓     |
| Technologie           | Ca/Ca |
| Adskiller             | PE    |
| Empfohlener Ladestrom | 4A    |


#### Anschlusspol Typ

#### Zellenanordnung


#### Batteriehälter

#### T1


Standard DIN Post



Positive Terminal



Negative Terminal

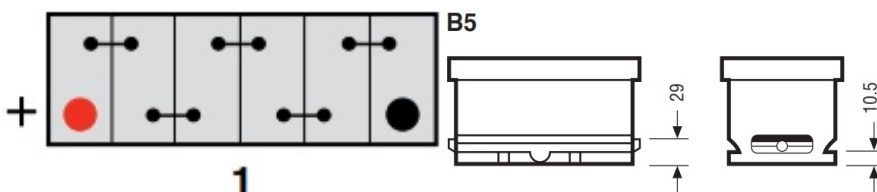

Datenblatt erstellt am 20/04/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa L26-70 - Leisure Batteries

#### Performance

|                            |       |
|----------------------------|-------|
| Voltage                    | 12V   |
| Capacity (20-hour)         | 70Ah  |
| Cold Cranking Amps (EN1)   | 480A  |
| Marine Cranking Amps (MCA) | 580A  |
| Watt Hour                  | 840Wh |

#### Dimensions

|        |       |
|--------|-------|
| Length | 260mm |
| Width  | 174mm |
| Height | 225mm |



#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 18kg       |
| Acid Volume           | 4.4 litres |

#### Container Features

|                           |                 |
|---------------------------|-----------------|
| Case Type                 | GR24 BCI        |
| Cell Layout               | 1               |
| Hold Down                 | B5              |
| State of Charge Indicator | ✓               |
| Handles                   | ✓               |
| End Venting               | ✓               |
| Lid Type                  | Central Venting |

#### Technology

|                         |       |
|-------------------------|-------|
| Flame Arrestor          | ✓     |
| Technology              | Ca/Ca |
| Separator               | PE    |
| Recommended Charge Rate | 4A    |



#### Terminal Type

#### Cell Assembly Layout

#### Battery Hold-down

##### T1

Standard DIN Post

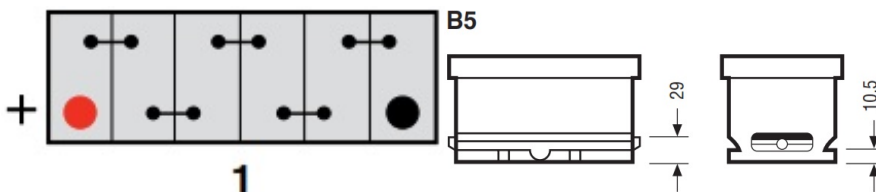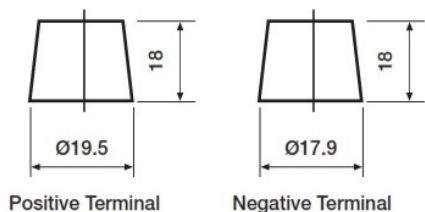

Data Sheet generated on 20/04/2024 - E&OE