



Yuasa Technisches Datenblatt

Yuasa YBX3750 - YBX3000 SMF Batterien

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 66Ah
Kaltstartstrom (A) EN1 660A

Abmessungen

Länge 230mm
Breite 179mm
Höhe 185mm

Maße und Gewichte

Durchschnittliches Gewicht 15kg
inkl. Säure




Gehäuseeigenschaften

Gehäusotyp US Group 75R FT
Zellenanordnung 1
Batteriehälter B1
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp SMF doppelwandige
Deckelkonstruktion


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
VDA Überschlagentest ✓
Empfohlener Ladestrom 4A
Performance Marking W4-C2-V3-E1


Anschlusspol Typ



Zellenanordnung

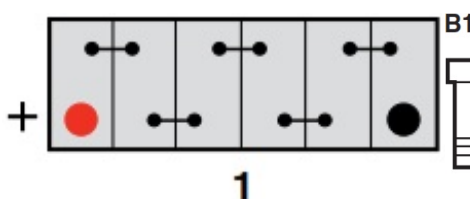

Batteriehälter

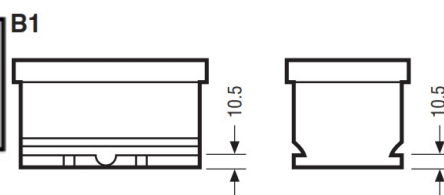

Datenblatt erstellt am 25/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3750 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	66Ah
Cold Cranking Amps (EN1)	660A

Dimensions

Length	230mm
Width	179mm
Height	185mm

Weights & Measures

Mean Weight with Acid	15kg
-----------------------	------




Container Features

Case Type	US Group 75R FT
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1


Terminal Type



Cell Assembly Layout

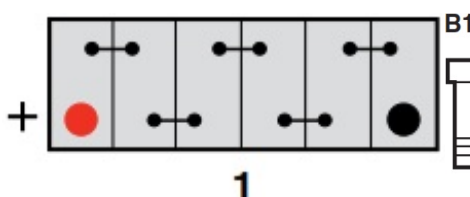

Battery Hold-down

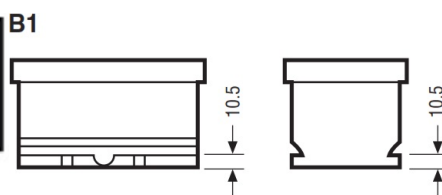

Data Sheet generated on 25/04/2024 - E&OE