



Yuasa Technisches Datenblatt

Yuasa YBX5069 - YBX5000 Silver High Performance SMF Batterien

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 75Ah
Kaltstartstrom (A) EN1 650A

Abmessungen

Länge 269mm
Breite 174mm
Höhe 225mm

Maße und Gewichte

Durchschnittliches Gewicht 18.1kg
inkl. Säure



Gehäuseeigenschaften

Gehäusotyp JIS D26 + B9
Zellenanordnung 1
Batteriehälter B5
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp SMF doppelwandige
Deckelkonstruktion


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
VDA Überschlagentest ✓
Empfohlener Ladestrom 4A
Performance Marking W4-C2-V3-E1

Anschlusspol Typ

T1


Standard DIN Post

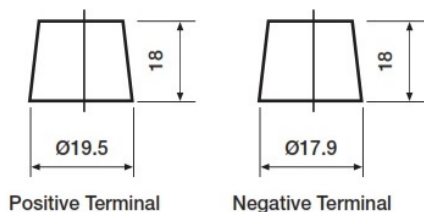


Positive Terminal

Negative Terminal

Zellenanordnung

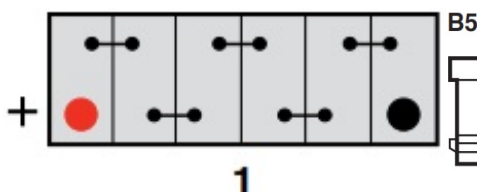

Batteriehälter

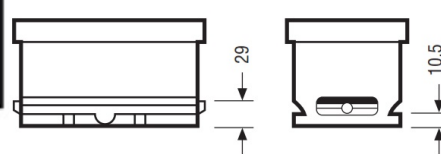

Datenblatt erstellt am 26/04/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5069 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	75Ah
Cold Cranking Amps (EN1)	650A

Dimensions

Length	269mm
Width	174mm
Height	225mm

Weights & Measures

Mean Weight with Acid	18.1kg
-----------------------	--------



Container Features

Case Type	JIS D26 + B9
Cell Layout	1
Hold Down	B5
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1




Terminal Type

Cell Assembly Layout

Battery Hold-down

T1

Standard DIN Post

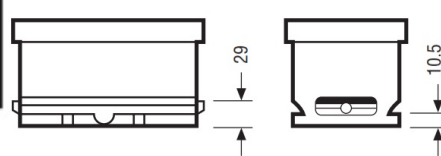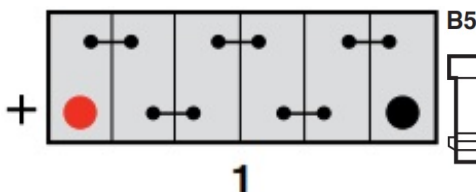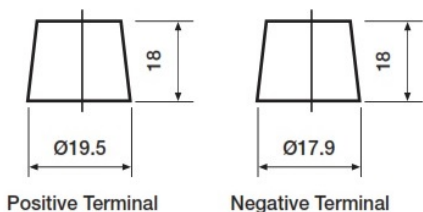

Data Sheet generated on 26/04/2024 - E&OE