

Yuasa Technisches Datenblatt

Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	40Ah
Kaltstartstrom (A) EN1	400A

Abmessungen

Länge	197mm
Breite	128mm
Höhe	227mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	10.7kg
Säurevolumen	2.7 Liter



Gehäuseeigenschaften

Gehäusotyp	B20 JIS EFB (M42R)
Zellenanordnung	1
Batteriehälter	N
Deckeltyp	Flacher Deckel


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
Empfohlener Ladestrom	2A
Performance Marking	W3-C2-V3-M1


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Zellenanordnung

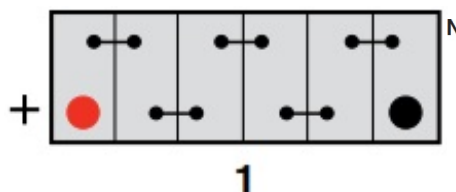

Batteriehälter



Datenblatt erstellt am 16/03/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	197mm
Width	128mm
Height	227mm

Weights & Measures

Mean Weight with Acid	10.7kg
Acid Volume	2.7 litres



Container Features

Case Type	B20 JIS EFB (M42R)
Cell Layout	1
Hold Down	N
Lid Type	Flat Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	2A
Performance Marking	W3-C2-V3-M1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

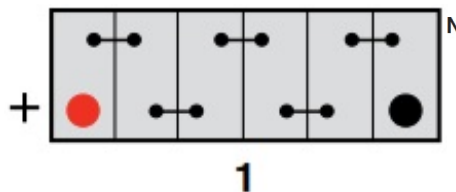

Battery Hold-down



Data Sheet generated on 16/03/2025 - E&OE