



Yuasa Technisches Datenblatt

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung 12V
 Kapazität 20 Std (vorgegeben) 50Ah
 Kaltstartstrom (A) EN1 520A

Abmessungen

Länge 207mm
 Breite 175mm
 Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 15.9kg



Gehäuseeigenschaften

Gehäusotyp L1 DIN AGM
 Batteriehalter B3
 Tragegriffe ✓
 Entgasung ✓
 Semi Traktionseigenschaften ✓
 Deckeltyp VRLA

Technologie

Flammschutz ✓
 Technologie Ca/Ca VRLA
 Adskiller AGMSORTIMENT
 VDA Überschlagentest ✓
 Empfohlener Ladestrom 3A
 Performance Marking W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Zellenanordnung

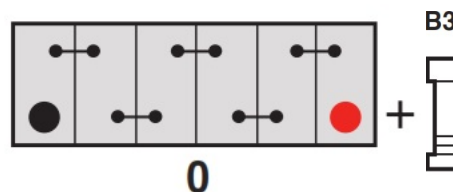

0

Batteriehalter

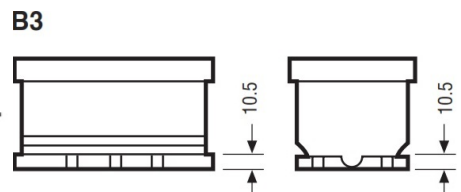

Datenblatt erstellt am 17/05/2021 - E&EO





Yuasa Technical Data Sheet

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	520A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	15.9kg
-----------------------	--------



Container Features

Case Type	L1 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

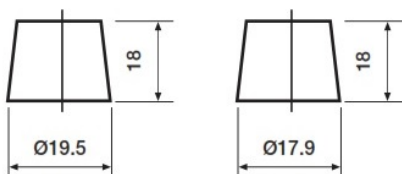


Positive Terminal

Negative Terminal

Cell Assembly Layout

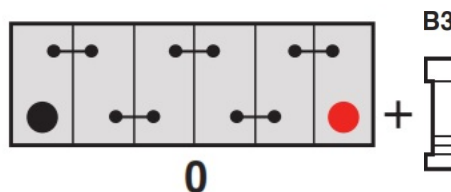

Battery Hold-down

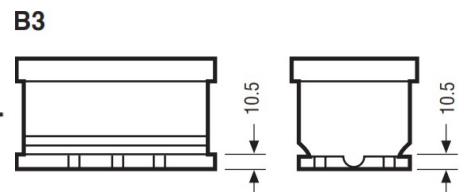

Data Sheet generated on 17/05/2021 - E&OE